
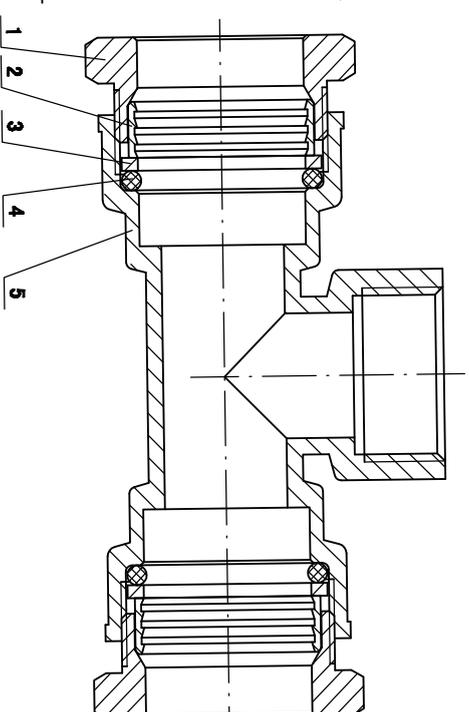
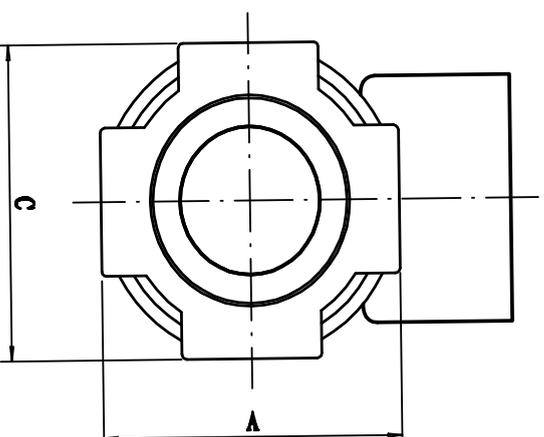


Té SR Femelle PN: 16 bars

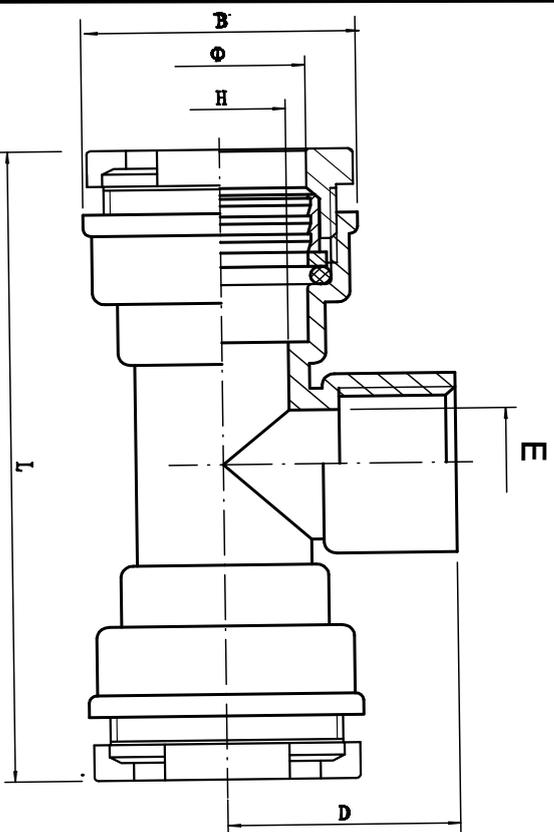

Φ	L	H	A	B	C	D	E
20X 1/2 F	85.8	15	32	33	32	28	15
25X 3/4 F	99.8	19	38	37	38	35	19
32X 1 F	117.8	25	47	45	47	40	23.5
40X 1 1/4 F	138.8	25	55	56	55	55	25
50X 1 1/2 F	159.8	33	70	70	70	63	33
63X 2 F	180.8	45	84	84	84	74	45

N°	désignation	matériaux	Qté
5	corps	CuZn36Pb2AS	1
4	joint torique	NBR 70	2
3	bague de fixation	CuZn36Pb2AS	2
2	bague à griffe	CuZn36Pb2AS	2
1	écrou	CuZn36Pb2AS	2

NB: les pièces doivent être nettoyées avant d'être assemblées et les impuretés ne doivent pas pénétrer dans le corps